
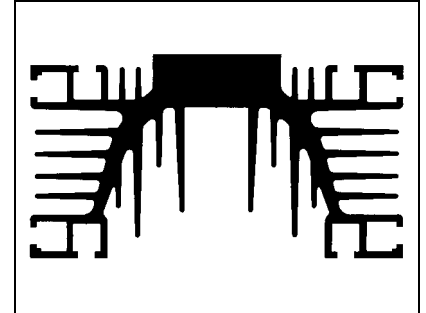


Standard lengths ¹⁾	R _{thha} ²⁾ natural cooling °C/W	R _{thha} V _{air} = 4 m/s °C/W	w kg
2 x P 11/250	0,195 (300 W)	0,05	7,5
2 x U 3/300	0,145 (400 W)	0,04	14,2


Heatsinks

P 11
U 3

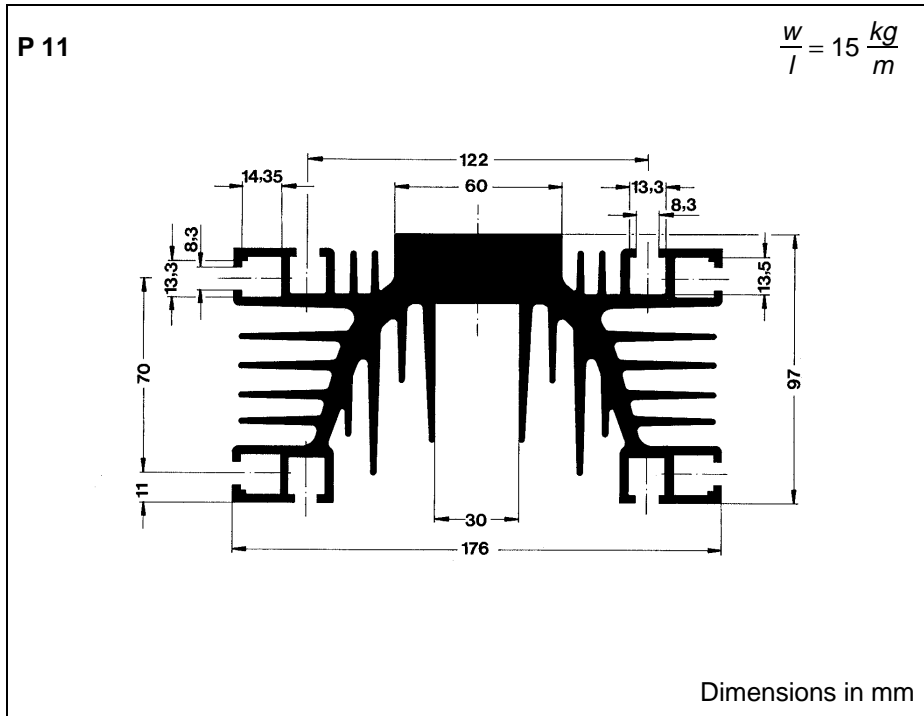

Features

- Intended for isolated power modules: the SEMIPACK and SEMITRANS ranges, and also for the SEMIPONT bridge rectifier range
- Designed mainly for forced air cooling
- Available in various lengths
- Mounting channels are provided for additional accessories

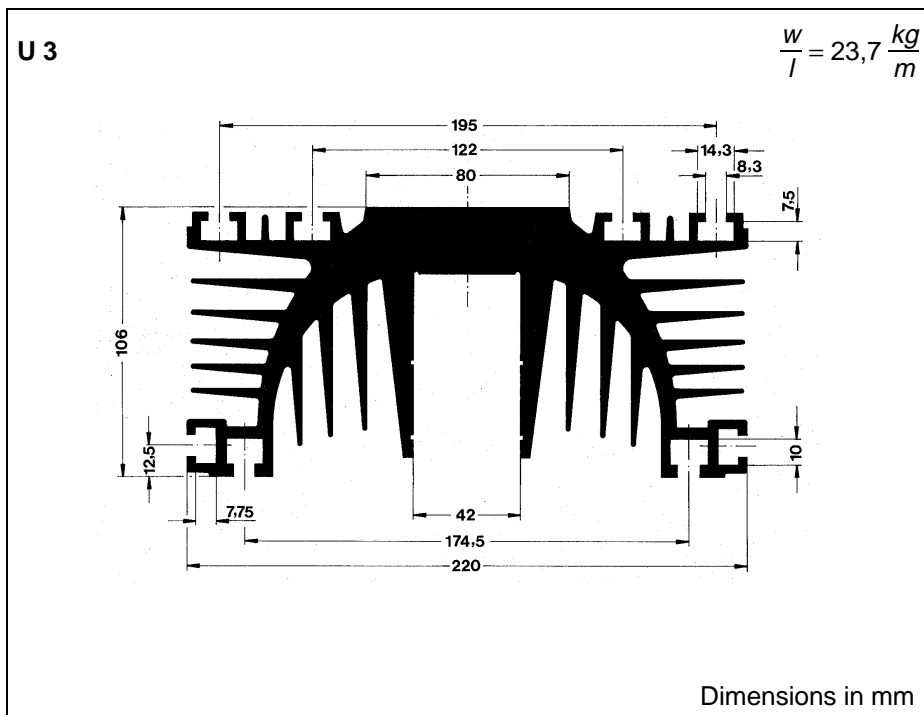

¹⁾ Non-standard lengths available on request

²⁾ At the given total power dissipation

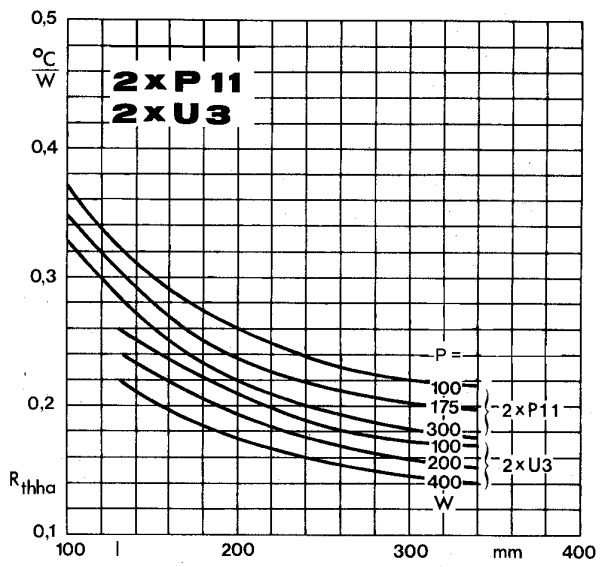


Fig. 2 Thermal resistance per component vs. length

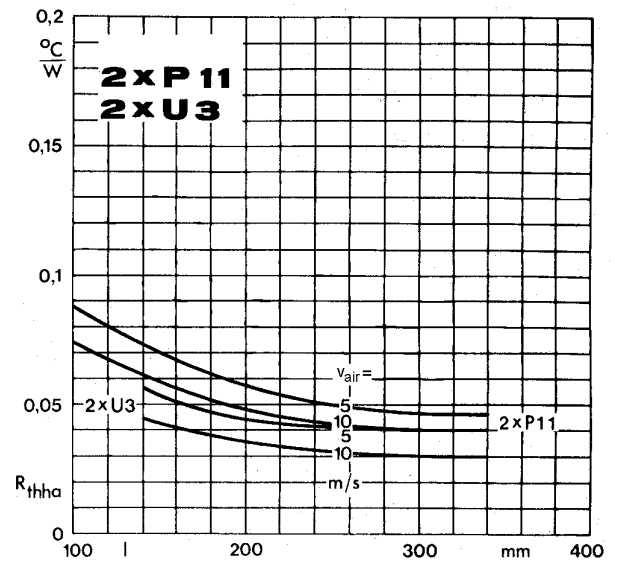


Fig. 6 Total thermal resistance vs. length